



USB2.0 to ASI (+ DVB-SPI) adapter

DiviPitch™

Turn your desk- or laptop into an MPEG2 Transport Stream player with DVB-ASI full support (SPI option)


APPLICATIONS

Development

- Cost effective (R&D)
- Robust and flexible (QA and testing)
- Support of MPEG2 parallel (LVDS or TTL)

Demonstration

- Pocket sized, easy for traveling
- Ideal for roadshows, trade shows...

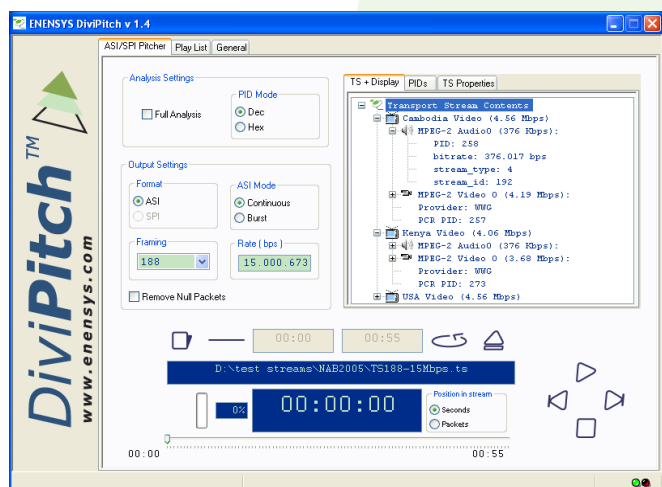

KEY FEATURES


RoHS
2002/95/EC

Stream Broadcast Player

- Segment / Loop play mode
- Packet size changing
- Raw Mode support
- Null packets removal
- Play List handling
- ASI bit rates: 10kbps to 216Mbps
- SPI bit rates: 10kbps to 108Mbps

Stream analysis and preview

- Off-line analysis + preview
- Windows XP/2000 software
- Services audio/video display
- USB self powered

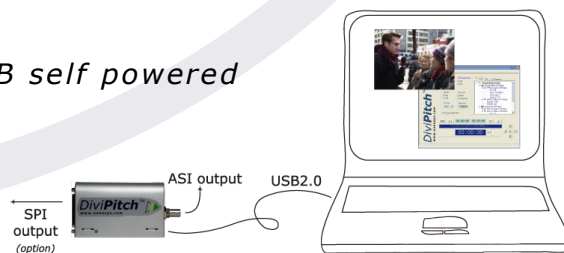

MECHANICAL

Housing dimensions (whd) 115 x 62 x 27 (in millimeters)
4.5 x 2.4 x 1 (in inches)

ORDERING CODES

DiviPitch ASI	USB2.0 to DVB-ASI adapter
DiviPitch ASI+LVDS	USB2.0 to DVB-ASI and DVB-SPI (LVDS) adapter
DiviPitch ASI+TTL	USB2.0 to DVB-ASI and DVB-SPI (TTL) adapter

All coming with software (Windows XP/2000)

ENENSYS Technologies

Le Germanium
80 avenue des Buttes de Coesmes
35700 Rennes
FRANCE

Office (+33) 1 70 72 5170
Fax (+33) 2 99 36 03 84
contact@enensys.com