

GigaCasterII

High density TS over IP gateway



**GigaCasterII is
ENENSYS
bidirectional TS over
IP gateway to deliver
digital TV content
over IP networks.**

ENENSYS GigaCasterII is a bidirectional TS over IP gateway that provides a versatile, dense, and reliable solution for delivering digital TV content over IP.

Dense TS over IP Gateway

GigaCaster II is a high density TS over IP gateway that can carry up to 8 MPEG-2 Transport Streams (MPEG-2 TS) in ASI to IP direction or in IP to ASI direction. Each MPEG-2 TS can include either MPEG-2, MPEG-4 (H.264), HEVC (H.265) video content in SD, HD or UHD format.

IP jitter & Packet Loss Management

The GigaCaster II is the most efficient TS over IP Gateway to cope with all IP network drawbacks: removing IP network jittering, recovering IP packet loss using FEC ProMPEG CoP#3, substituting bursty packet loss with NULL packets while maintaining an accurate and constant output bit rate and re-ordering IP datagrams.

Unit and Streams Redundancy Schemes

When broadcasting over Single Frequency Network, the GigaCaster II implements a patented technology that guarantees a reliable SFN broadcasting with or without external 10MHz reference. It offers various redundancy mechanisms at unit level (DistriGuard) and stream level (Dual IP) to ensure a safe IP delivery.

Versatile and Multi-Standard Gateway

The GigaCaster II can be set up as an ASI to IP or IP to ASI converter.

Supporting ATSC, DVB, and ISDB-T standards, it can be deployed in multiple broadcast environments where it is required to connect legacy equipment to IP networks.

Applications

- Studio/Head-end interconnection
- Primary or secondary distribution
- Point-to-point video delivery
- DVB-T/DVB-T2 distribution to transmitters
- Reliably connect legacy ASI devices to IP networks

Other benefits

- Up to 8 TS over IP streams managed
- Unicast, Multi-Unicast and Multicast support
- Bidirectional ASI or IP delivery in the same unit
- 1+1 unit redundancy with DistriGuard
- 1+1 stream redundancy with Dual IP option

GigaCasterII

High density TS over IP gateway

Technical specifications

INPUTS/OUTPUTS

Control

2x Gigabit Ethernet (RJ45) for GUI/SNMP

ASI

MPEG-2 Transport Stream over ASI

Up to 8 bidirectional DVB-ASI (BNC)

Up to 100 Mb/s per TS

Up to 400 Mb/s over all TS with FEC

GPS

1x 10 Mhz input for accurate bit rate

IP

MPEG-2 Transport Stream over IP

2x Gigabit Ethernet (RJ 45)

2x Optional SFP port

600 Mb/s maximum throughput

RTP or UDP datagrams

FEATURING

IP Encapsulation

DVB-IPI - SMPTE 2022 compliant

From 1 to 7 TS packets/IP packet

Packet Loss Recovery

Packet loss correction based on:

- FEC Pro MPEG CoP#3

- RTP recovery for bursty loss

Single Frequency Network

Accurate bit rate adaptation with or without 10MHz external input

Monitoring

ETR290 Priority1 Monitoring on ASI ports

Network Jittering

Packet loss/recovered/out-of-sequence/reordered

Real-time bit rate input

IP Management

Unicast, Multi-Unicast and Multicast

VLANs Management

IGMP v2/V3 support

Jitter Removal

Configurable buffer (10 - 900ms) to absorb network jittering

Redundancy

1+1 unit redundancy in ASI > IP

1+1 streams redundancy - (DualIP option)

Control and Supervision

Easy-to-use web based GUI

In-band control possible

Full SNMP v2 support

PHYSICAL

Height

44 mm / 1.7 in.

Depth

274 mm / 10.79 in.

Front Panel

LCD display for control & monitoring

Power consumption

20 W

Width

444 mm / 17.48 in.

Format

1 RU, width 19 in.

Power Supply


Single 220V PSU

GigaCasterII


High density TS over IP gateway

GigaCasterII Typical Use Cases

Point-to-Point contribution over IP

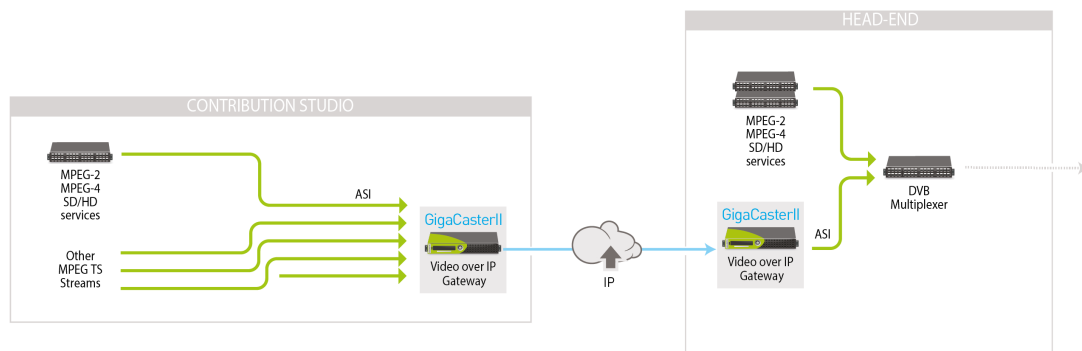

DTT Multiplex distribution to multiple transmitters sites

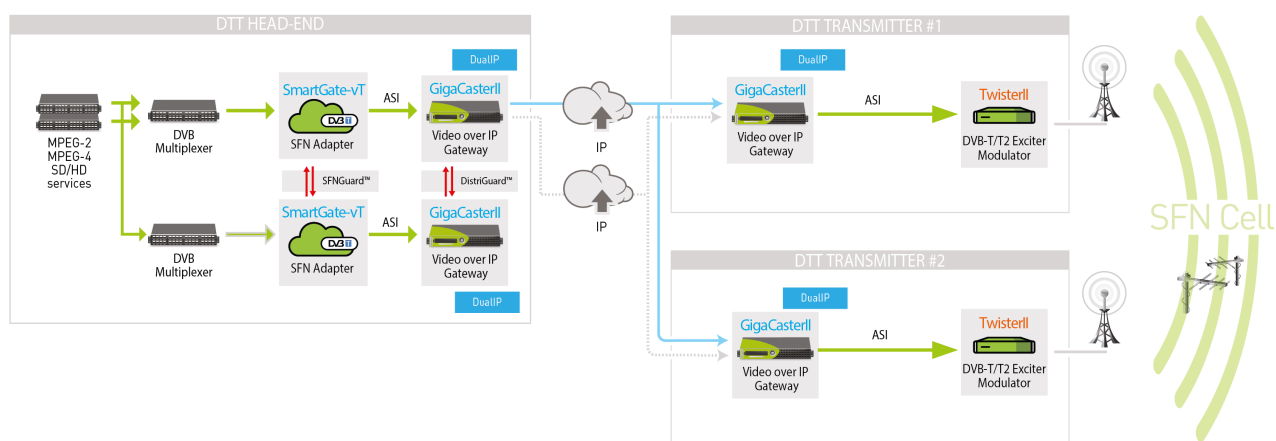

Ordering codes

GigaCasterII-ASI4

GigaCasterII shipped with 4 ASI ports and 4 activated DVB-ASI I/O

GigaCasterII-ASI4-SFP

GigaCasterII shipped with 4 ASI ports and 4 activated DVB-ASI I/O - 2 SFP ports (SFP module not provided)

Ordering options

NN6-In220V-Redundant (Hardware option)

110/220V Redundant power supply option - Hardware option

NN6-In48V-Redundant (Hardware option)

48V Redundant power supply option - Hardware option

GigaCasterII-ASI8

GigaCasterII shipped with 8 ASI ports and 8 activated DVB-ASI I/O

GigaCasterII-ASI8-SFP

GigaCasterII shipped with 8 ASI ports and 8 activated DVB-ASI I/O - 2 SFP ports (SFP module not provided)

NN6-In48V (Hardware option)

48V DC input voltage instead of 110V/220V - Hardware option

DualIP

Redundancy of IP streams option